



Sharper Finish



Finish Master® 3000
With Built-In Folder

One of over 100 ironer models we manufacture

Features - Finish Master®

120" (3m) ironing width. 30" (762 mm) diameter revolving heated cylinder, that can process 400 sheets per hour. Great for ironing high quality cotton sheets. Also available 132" (3352 mm) and 136" (3455 mm) wide.

*Made by "The Ironer People"™. This is all we do and we do it well. You cannot find an ironer on the market that is less complicated than the Finish Master®. We work hard to simplify our design so you have less to worry about. The Finish Master® lets you do more with less.

*The "mean-green machine". We use thick gauge metal with steel welded construction. This makes the Finish Master® stronger than any other machine in its class, insuring a long life and maximum return on your investment.


*Folded linen can be removed from the front or rear of the ironer.

*Clearly the most versatile machine in its class. Adding one operator will more than double potential production.

*The Finish Master® can be heated by gas or steam. The gas heated models are equipped with the full width multi-port H.O.T.™ induced draft burner that evenly distributes the heat with a total of nine parts. Compare that to others burners using nearly fifty parts or those that heat oil and have two pumps and long piping to heat the ironer.

Dimensions

Dimensions	
A	185" (4700 mm)
B	78" (1981 mm)
C	96" (2438 mm)
D	85" (2159 mm)
E	16" (406 mm)
F	49 ½" (1260 mm)
G	18" (457 mm)
I	21" (533 mm)
J	96" (2438 mm)
K	28" (711 mm)

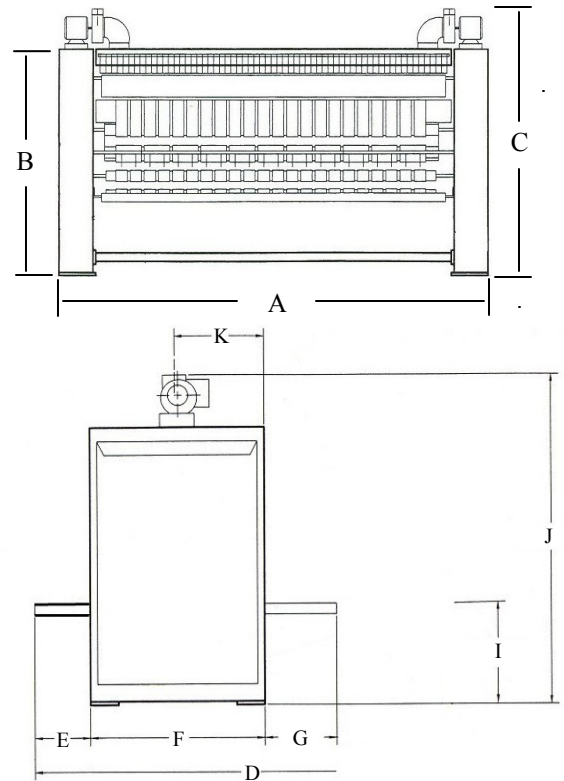

► Each canopy blower discharge is approximately 1050 C.F.M. at 1" S.P. Vent must be independent and not connected with any other vent line. Use 10" diameter vent.

► Allow minimum of 24" (610 mm) clearance at ends of ironer for maintenance access.

► Do not use for construction purposes unless certified correct by CMV Sharper Finish.

► Available for any electrical specification.

* Rear mode, assumes blended sheets at 25 % moisture retention

► © 2009 by CMV Sharper Finish, Inc. Form CMV923 In view of CMV's policy of providing the best products possible, CMV reserves the right to change specifications and appearance without notice. Contact the sales department for exact specifications, dimensions, and product approvals. CMV manufactures over 100 different ironer models that are sold throughout the world.

Technical Data	Model G/AF3000	Model S/AF3000
Finishing Surface Width-Inches (mm)	120 (3048)	120 (3048)
Heated Roll Diameter-Inches (mm)	30 (762)	30 (762)
Finishing Speed-Feet per minute (m/min)	20-100 (6.1 -30.5)	25-70 (6.1 -30.5)
Electrical Requirements-H.P. (kW)	3+ 2 x 1 (2.24 + 2 x .746)	3+ 2 x 1 (2.24 + 2 x .746)
Maximum Gas Input-B.T.U./hr. (Cal. kg/hr.)	495,000 (145)	-
Steam Consumption-Boiler H.P. (kg/hr.)	-	6.6 (108)
Net Weight-Pounds (kg)	7950 (3630)	8650 (3950)
Crated Weight-Pounds (kg)	8450 (3859)	9150 (4178)
Crated Size L x W x H-Inches (mm)	176 x 64 x 79 (4470 x 1626 x 2007)	176 x 64 x 79 (4470 x 1626 x 2007)
Crated Volume-Cubic Feet (m³)	515 (14.6)	515 (14.6)



CMV
Sharper Finish, Inc.
 4500 Augusta Boulevard
 Chicago, Illinois 60651-3399 U.S.A.
 Telephone: 773-276-4800
 Facsimile: 773-276-6878
 Email: sales@cmvsharperfinish.com

Distributed by:

Toll Free U.S.A. and Canada: 800-247-IRON (4766)